


SUNFLEX 501N - CLEAR

Non Toxic Suction & Delivery

Applications:

Suction Of Slurries, Food Stuffs, Potable Water, Distillates Up To 28° Alcohol etc.

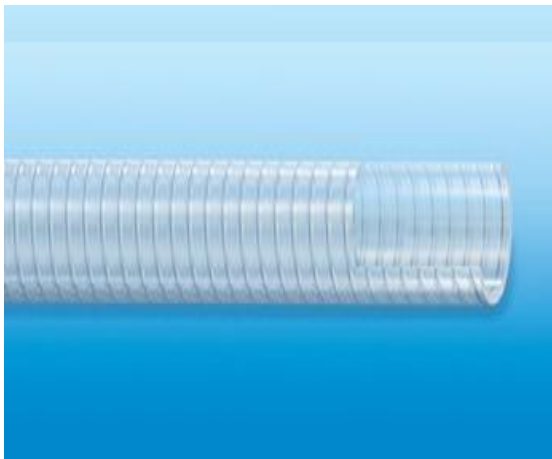

Structure	: Soft PVC Hose With Embedded Steel Wire Reinforcement. Transparent.
Tolerances	: +/- 5%
Internal Diameter	: +/- 2%
Working Temperature	: Static Conditions: -20°C To +65°C : Dynamic Conditions: -5°C To +43°C

Part No	Internal Diameter		Working Pressure	Vaccum	Bending Radius	Coil Length	Hose Weight
	mm	inch	kp/cm ²	mbar	mm		
			(23 +/- 2°C)	(23 +/- 2°C)	(23 +/- 2°C)	m/roll	g/mt
501019N	19	3/4	7.0	900	45	25/30/50	320
501025N	25	1	6.0	900	60		510
501032N	32	1-1/4	5.0	900	80		630
501038N	38	1-1/2	5.0	900	90		780
501051N	51	2	5.0	900	125		1250
501063N	63	2-1/2	4.0	850	160		1800
501076N	76	3	4.0	850	200		2200
501090N	90	3-1/2	3.0	800	250	25/30	2850
501102N	102	4	2.5	800	300		3500
501127N	127	5	2.0	800	380	20/25	4600
501152N	152	6	2.0	750	450		6400