

AGGRESSIVE CHEMICALS - PTFE



The superior chemically inert quality of Fluoropolymers, makes **COMPOTEC® PTFE** hoses ideal for the transfer of a wide range of very hazardous chemicals. This universal hose can help eliminate the costly redundancy of inventory to maintain the various hose constructions usually required.

COMPOTEC® assemblies are fitted with an extensive range of couplings that can also be PTFE tatted or treated with the exclusive **EPTAFLO BLUE** Coat resistant to almost all chemicals. **COMPOTEC®** assemblies are tested in accordance with EN ISO 1402.

The securing ferrule is permanently engraved, with hose data, in compliance with PED Directive (97/23/ CE). **COMPOTEC®** hoses can be supplied in the **FIRETEC** version with ADR self-extinguish CL1 cover.

All **COMPOTEC®** hoses are available in 40 mt coils from 3/4" to 8" and 25 mt length up to 12". Outer cover is also available in **ELASTAR**, a special PU coated fabric; its UV, Ozone, Sunlight and weathering resistance, offers superior temperature and abrasion characteristics.

Electrical continuity is achieved by the two wires bonded to the end fittings, this helps dissipate accumulated charge and to avoid static flash. The electric resistance of hose assemblies is less than 10 ohms, as required by EN ISO 8031. Upon request it's possible to manufacture **COMPOTEC®** hoses in accordance to the Directive 94/9/EC "ATEX", with a special outer antistatic black cover.

All **COMPOTEC®** hoses are 100% Antistatic - Electrically continuous, meets the EN, CE, AS, U.S. Coast Guard requirements, NAHAD Guidelines, are Lloyds and DNV approved and ATEX certificate can be released on request.

Heavy Duty **PTFE 300 HD**, is offered in two versions, the first using as an inner layer in contact with the product a pure **Skived film of PTFE**, the second is manufactured around the new **TEFLON®** laminate film **NANOTEC®**.



PTFE 300 HD

NANOTEC® obtained with the latest and highest standard of Nanotechnology, ensuring unique mechanical strength and ZERO porosity. **NANOTEC®** is a flexible, tear resistant material with superior capabilities compared to other PTFE products. **NANOTEC®** is made of 100% **TEFLON® Du Pont**, making it impervious to "chemical attack" and eliminating the need for reinforcements. Regardless of the chemical environment **Nanotec** retains all of its physical properties. **NANOTEC®** a ZERO porosity material!!! Using an innovative nanotechnology cross-lamination process results in **NANOTEC®** having an incredible 360° tear strength, superb durability and operating temps of up to 316°C/600°

The **NANOTEC®** technology is a Patented Design exclusive and unique, belonging to **MATEC GROUP**. All the different layers are wrapped together and tensioned between inner and outer spirals.

PTFE 300 HD - NANOTEC INSIDE

NANOTEC® obtained with the latest and highest standard of Nanotechnology, ensuring unique mechanical strength and ZERO porosity. **NANOTEC®** is a flexible, tear resistant material with superior capabilities compared to other PTFE products. **NANOTEC®** is made of 100% **TEFLON® Du Pont**, making it impervious to "chemical attack" and eliminating the need for reinforcements. Regardless of the chemical environment **Nanotec** retains all of its physical properties. **NANOTEC®** a ZERO porosity material!!! Using an innovative nanotechnology cross-lamination process results in **NANOTEC®** having an incredible 360° tear strength, superb durability and operating temps of up to 316°C/600°

The **NANOTEC®** technology is a Patented Design exclusive and unique, belonging to **MATEC GROUP**. All the different layers are wrapped together and tensioned between inner and outer spirals.

CHEMCHLOR 900 HD

Applications: **CHEMCHLOR 900** is a specific hose designed for very aggressive chemicals suction or delivery. It is used in such applications as transfer of all the Chlorine derivatives, **Hydrochloric acid, Nitric and Sulphuric acid**. Heavy Duty construction, can be used for Ship to Shore and Ship to Ship, Dockside and in general for the most arduous Industrial and Marine applications. This type of hose use as a first layer the new patented **NANOTEC®** **TEFLON®** film, for superior chemical inertness.

Construction: Inner first layer in contact with the wet parts, is made with the unique **NANOTEC®** **TEFLON®** film ensuring the highest mechanical strength and ZERO porosity, high strength polypropylene and **MYLAR** films and fabrics, high density polyethylene films reinforcement, includes in the construction an **FEP** seamless tubular extruded film, to avoid any possible leak and guarantee a gas-tight construction, Vinyl coated polyester fabric cover, fire resistant, abrasion, weather and ozone resistant.

PTFE SD - STANDARD DUTY

Applications : General purpose Standard Duty hose suitable for the safe transfer of a wide variety of Chemicals under suction or pressure where the chemical resistance of polypropylene is inadequate. Commonly used for loading and unloading of road and rail tankers, storage tank and in-plant applications.

Construction: Inner first layer in contact with the fluid is made with **ECTFE** films. High strength polypropylene films and fabrics, high density polyethylene films reinforcement, Vinyl coated polyester fabric cover, fire resistant, abrasion, weather and ozone resistant. **PTFE SD**, the Standard Duty hose has a WP of 10 Bar and a W.T. from -30 to +80°C.



HEAVY DUTY PTFE SUCTION & DISCHARGE HOSE EN 13765:2010 TYPE 3

Size		Max. W.P.		Safety factor	Bend Radius EN ISO 1746		Weight Kg/mt
mm	inch	Bar	Psi		mm	inch	
20	3/4"	15	200	5:1	75	3	0,63
25	1"	15	200	5:1	100	4	0,77
32	1 1/4"	15	200	5:1	125	5	1,05
40	1 1/2"	15	200	5:1	140	5 1/2	1,33
50	2"	15	200	5:1	180	7	2,04
65	2 1/2"	15	200	5:1	220	8,5	2,75
75/80	3"	15	200	5:1	180	11	3,15
100	4"	15	200	5:1	400	16	4,74
150	6"	15	200	5:1	550	22	10,50
200	8"	15	200	5:1	800	32	12,85
250	10"	15	200	5:1	1000	40	20,96
300	12"	15	200	5:1	1200	48	31,69

PTFE 300 HD

Code	PTFE 300HD XZ	PTFE 300HD XX
Applications	Heavy Duty aggressive chemicals liquid transfer	
Colour	Red	
Temperature	-40 +100°C	
Inner wire	Stainless Steel	Stainless Steel
Outer wire	Galvanized Steel	Stainless Steel

PTFE 300 HD NANOTEC INSIDE

Code	NANOTEC HD XZ	NANOTEC HD XX
Applications	Heavy Duty aggressive chemicals liquid transfer	
Colour	Red	
Temperature	-40 +125°C	
Inner wire	Stainless Steel	Stainless Steel
Outer wire	Galvanized Steel	Stainless Steel

HIGHLY AGGRESSIVE / HEAVY DUTY "PTFE NANOTEC" SUCTION & DISCHARGE HOSE EN 13765:2010 TYPE 3

Size		Max. W.P.		Safety factor	Bend Radius EN ISO 1746		Weight Kg/mt
mm	inch	Bar	Psi		mm	inch	
20	3/4"	15	200	5:1	75	3	0,63
25	1"	15	200	5:1	100	4	0,77
32	1 1/4"	15	200	5:1	125	5	1,05
40	1 1/2"	15	200	5:1	140	5 1/2	1,33
50	2"	15	200	5:1	180	7	2,04
65	2 1/2"	15	200	5:1	220	8,5	2,75
75/80	3"	15	200	5:1	180	11	3,15
100	4"	15	200	5:1	400	16	4,74
150	6"	15	200	5:1	575	23	10,00
200	8"	15	200	5:1	800	32	12,85
250	10"	15	200	5:1	1000	40	20,96
300	12"	15	200	5:1	1200	48	31,69

CHEMCHLOR 900 HD NANOTEC INSIDE

Code	CHEMCHLOR 900HD FX	CHEMCHLOR 900HD FP
Applications	Heavy Duty, highly aggressive chemical transfer	
Colour	Yellow / Purple	
Temperature	-40 +125°C	
Inner wire	PVDF Coated Stainless Steel	PVDF Coated Stainless Steel
Outer wire	Stainless Steel	PP Coated Steel

STANDARD DUTY PTFE SUCTION & DISCHARGE HOSE EN 13765:2010 TYPE 2

Size		Max. W.P.		Safety factor	Bend Radius EN ISO 1746		Weight Kg/mt
mm	inch	Bar	Psi		mm	inch	
40	1 1/2"	10	150	5:1	100	4	1,04
50	2"	10	150	5:1	150	6	1,56
65	2 1/2"	10	150	5:1	200	8	1,87
75/80	3"	10	150	5:1	250	10	2,23
100	4"	10	150	5:1	300	12	3,62
150	6"	10	150	5:1	500	20	8,91
200	8"	10	150	5:1	740	29	11,16

PTFE SD ECTFE INSIDE

Code	PTFE SD XZ	PTFE SD XX
Applications	Standard Duty aggressive chemical liquid transfer	
Colour	Red	
Temperature	-30 +80°C	
Inner wire	Stainless Steel	Stainless Steel
Outer wire	Galvanized Steel	Stainless Steel

AGGRESSIVE CHEMICALS PTFE

DNV Det Norske Veritas Cert. n. CERT-04193-99-AQ IND-SINCERT
EN 13765:2010, approved from CEN
Directive 97/23/CE "PED" with operating Procedures certified from DNV - CE PED 07.0056.06/2585
Directive 94/9/CE "ATEX" hose for explosive atmospheres, Cert. held by DNV Rec. nr. CE ATE 08.0117.06/2617 - (AS 2430.1-1987)
BS 5842:1980 (Conf. 1986)
BS 3492:1987
AS 2683-2000 (Hose & hose assemblies for distribution of petroleum and petroleum products)
AS 2117-1991 (Hose & hose assemblies for petroleum and petroleum products - Marine suction and discharge)
NAHAD Guidelines (NAHAD 600/2005)

Test procedures:


BS 5173-102.10:1990 section 102.10 - (EN ISO 1402)
AS1180.5-1999 (method 5)
AS 1180.13B (Electrical resistance)
AS1180.13C (Electrical continuity)

Type Approval

Lloyd's Register Type Approved - Cert. N° 13/00002
DNV - Det Norske Veritas - Type Approval Cert. N° P-12369
RINA - Registro Italiano Navale - Cert. N° MAC/81398/1/TO/99
Russian Maritime Register of Shipping
IBC Code Chapter 5 - Ship's Cargo hoses
IMO Chemical Carrier Code - Paragraphs 2:12 and 5:7

Welding Process

in according to EN 15608:2005 - EN 439:1996 - EN 15614-1:2005 - EN 6848:2005 - EN 12072:2001 certified by DNV - Det Norske Veritas
in according to ASME IX certified by RINA

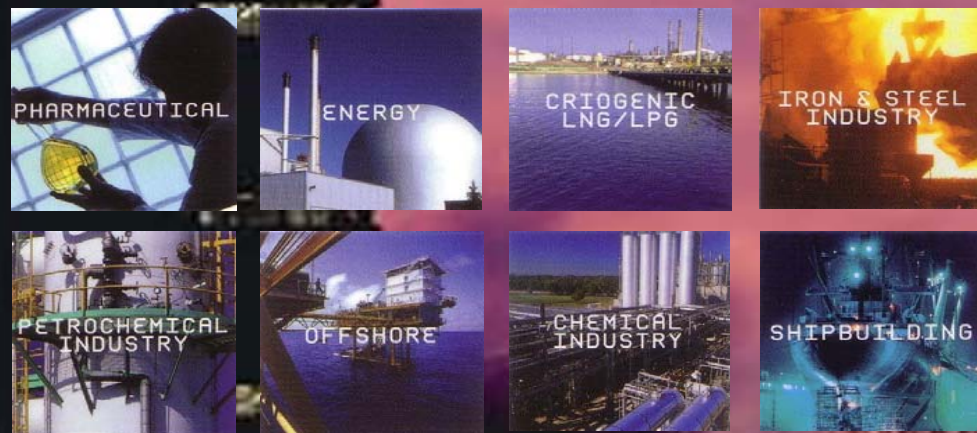

MATEC GROUP SRL
VIA I MAGGIO, 7 - PESCHIERA BORROMEO (MILANO) - ITALIA
Tel. +39 02 55 30 17 88 - Fax +39 02 54 72 158
matec@matecgroup.com
www.matecgroup.com

COMPOTEC®