

**“The Best Hose Suspension in the World”**



**MODEL**  
**HB 100 ED**  
**For**  
**Hose I.D. 1" (2.5cm)**



Material:	<b>URETHANE</b>	
Length:	<b>16" / 40.6 cm</b>	
Shipping Weight:	<b>3 lbs / 1.4 kgs</b>	
Shipping Dimensions:	<b>21 x 8 x 4" / 53 x 21 x 10 cm</b>	
Sling Model:	<b>Metal "D-Ring" Sling</b>	
Sling Type:	<b>RS 16D</b>	
*Sling height:	<b>8" / 20 cm</b>	
Sling Material:	<b>UV Resistant Treated Polyester</b>	
Rated Capacity:	<b>1350 lbs/ 612 kgs @ 5:1 WLL</b>	<b>437 kgs/ 964 lbs @ 7:1 WLL</b>
Maximum Temperature:	<b>200° F / 93.3° C</b>	

\*Measured from top of the bun to the top of the sling

**Notes:** The most popular petroleum hose model Used throughout the world at refueling stations.  
Often used conjunction with retractors.

**CE certified slings available at a rated capacity of 500 kgs @ 7:1**



© 2015 property of IceCap Equity Corp. All Rights Reserved.

**USA & Canada (Toll Free)**

Tel: 888-829-3773

Fax: 877-382-9626

**International**

Tel: 403-294-0275

Fax: 403-294-0274

**Email: [info@hosebun.com](mailto:info@hosebun.com)**

**“The Best Hose Suspension in the World”**



**MODEL**  
**HB 125 ED**  
**For**  
**Hose I.D. 1 1/4" (3.1cm)**



Material:	<b>URETHANE</b>	
Length:	<b>17.5" / 44.45 cm</b>	
Shipping Weight:	<b>3.5 lbs / 1.6 kgs</b>	
Shipping Dimensions:	<b>21 x 8 x 4" / 53.4 x 21 x 10 cm</b>	
Sling Model:	<b>Metal "D-Ring" Sling</b>	
Sling Type:	<b>RS 16D</b>	
*Sling height:	<b>7" / 17.8 cm</b>	
Sling Material:	<b>UV Resistant Treated Polyester</b>	
Rated Capacity:	<b>1350 lbs/ 612 kgs @ 5:1 WLL</b>	<b>437 kgs/ 964 lbs @ 7:1 WLL</b>
Maximum Temperature:	<b>200° F / 93.3° C</b>	

\*Measured from top of the bun to the top of the sling

**Notes:** Used with petroleum hose, refueling stations with hyhose retractors, hydraulic hose bundles and theatrical cabling.

**CE certified slings available at a rated capacity of 500 kgs @ 7:1**



© 2015 property of IceCap Equity Corp. All Rights Reserved.

**USA & Canada (Toll Free)**

Tel: 888-829-3773

Fax: 877-382-9626

**International**

Tel: 403-294-0275

Fax: 403-294-0274

**Email: [info@hosebun.com](mailto:info@hosebun.com)**

**“The Best Hose Suspension in the World”**



**MODEL  
HB 150 ED**

**For  
Hose I.D. 1½" (3.8cm)**



Material:	<b>URETHANE</b>	
Length:	<b>19.5" / 49.5 cm</b>	
Shipping Weight:	<b>4 lbs / 1.8 kgs</b>	
Shipping Dimensions:	<b>21 x 8 x 4" / 53 x 21 x 10 cm</b>	
Sling Model:	<b>Metal "D-Ring" Sling</b>	
Sling Type:	<b>RS 16D</b>	
*Sling height:	<b>6.5" / 16.5 cm</b>	
Sling Material:	<b>UV Resistant Treated Polyester</b>	
Rated Capacity:	<b>1350 lbs/ 612 kgs @ 5:1 WLL</b>	<b>437 kgs/ 964 lbs @ 7:1 WLL</b>
Maximum Temperature:	<b>200° F / 93.3° C</b>	

\*Measured from top of the bun to the top of the sling

**Notes:** Often used for bundled hoses/cables, like theatrical cable for lighting and sound.  
**CE certified slings available at a rated capacity of 500 kgs @ 7:1**



© 2015 property of IceCap Equity Corp. All Rights Reserved.

**USA & Canada (Toll Free)**

Tel: 888-829-3773

Fax: 877-382-9626

**International**

Tel: 403-294-0275

Fax: 403-294-0274

**Email: [info@hosebun.com](mailto:info@hosebun.com)**

**“The Best Hose Suspension in the World”**



**MODEL**  
**HB 200 ED**  
**For**  
**Hose I.D. 2" (5 cm)**



Material:	<b>URETHANE</b>	
Length:	<b>18" / 45.7 cm</b>	
Shipping Weight:	<b>4.5 lbs / 2 kgs</b>	
Shipping Dimensions:	<b>21 x 8 x 4" / 53 x 21 x 10 cm</b>	
Sling Model:	<b>Metal "D-Ring" Sling</b>	
Sling Type:	<b>RS 16D</b>	
*Sling height:	<b>7.25" / 18.4 cm</b>	
Sling Material:	<b>UV Resistant Treated Polyester</b>	
Rated Capacity:	<b>1350 lbs/ 612 kgs @ 5:1 WLL</b>	<b>437 kgs/ 964 lbs @ 7:1 WLL</b>
Maximum Temperature:	<b>200° F / 93.3° C</b>	

\*Measured from top of the bun to the top of the sling

**Notes:** Also available with Type 4 Hook-Eye sling (Model # RS 234H) for heavy duty jobs.  
(WLL for RS 234H: 2000lb / 907kgs @ 5:1 or 648kgs / 1428lbs @ 7:1)

**CE certified slings available at a rated capacity of 500 kgs @ 7:1**



© 2015 property of IceCap Equity Corp. All Rights Reserved.

**USA & Canada (Toll Free)**

Tel: 888-829-3773

Fax: 877-382-9626

**International**

Tel: 403-294-0275

Fax: 403-294-0274

**Email: [info@hosebun.com](mailto:info@hosebun.com)**

**“The Best Hose Suspension in the World”**



**MODEL  
HB 300 D**

**For  
Hose I.D. 3" (8 cm)**



Material:	<b>URETHANE</b>	
Length:	<b>12.75" / 32.4 cm</b>	
Shipping Weight:	<b>4.25 lbs / 1.93 kgs</b>	
Shipping Dimensions:	<b>13 x 6 x 5" / 32 x 15 x 12.5 cm</b>	
Sling Model:	<b>Metal "D-Ring" Sling</b>	
Sling Type:	<b>RS 234D</b>	
*Sling height:	<b>8" / 20 cm</b>	
Sling Material:	<b>UV Resistant Treated Polyester</b>	
Rated Capacity:	<b>2000 lbs/907 kgs @ 5:1 WLL</b>	<b>648 kgs/1428 lbs @ 7:1 WLL</b>
Maximum Temperature:	<b>200° F / 93.3° C</b>	

\*Measured from top of the bun to the top of the sling

**Notes:** Hosebun for 3" (7.6 cm) hose with "D-Ring" sling attachment for easier mounting.  
**CE certified slings available at a rated capacity of 1000 kgs @ 7:1**



© 2015 property of IceCap Equity Corp. All Rights Reserved.

**USA & Canada (Toll Free)**

Tel: 888-829-3773

Fax: 877-382-9626

**International**

Tel: 403-294-0275

Fax: 403-294-0274

**Email: [info@hosebun.com](mailto:info@hosebun.com)**

**“The Best Hose Suspension in the World”**



**MODEL**  
**HB 300 H**

**For**  
**Hose I.D. 3” (7.6 cm)**



Material:	<b>URETHANE</b>
Length:	<b>12.75" / 32.4 cm</b>
Shipping Weight:	<b>4.25 lbs / 1.9 kgs</b>
Shipping Dimensions:	<b>13 x 6 x 5"</b> <b>or</b> <b>36 x 15 x 13 cm</b>
Sling Type:	<b>Type 4 Hook Eye</b>
Sling Model:	<b>RS 234H</b>
*Sling height: <small>*Measured from top of the bun to the top of the sling</small>	<b>14.75" / 37.5 cm</b>
Sling Material:	<b>UV Resistant Treated Polyester</b>
Rated Capacity:	<b>2000 lbs/907 kgs @ 5:1 WLL</b>
	<b>648 kgs/1429 lbs @ 7:1 WLL</b>
Maximum Temperature:	<b>200° F / 93.3° C</b>

**Notes:** Hosebun for 3" (7.6cm) hose with type 4 hook eye sling for increased strength and work safety.  
**CE certified slings available at a rated capacity of 1000 kgs @ 7:1**



© 2015 property of IceCap Equity Corp. All Rights Reserved.

**USA & Canada (Toll Free)**

Tel: 888-829-3773

Fax: 877-382-9626

**International**

Tel: 403-294-0275

Fax: 403-294-0274

**Email: [info@hosebun.com](mailto:info@hosebun.com)**



**“The Best Hose Suspension in the World”**



**MODEL  
HB 400 D**

**For  
Hose I.D. 4" (10 cm)**



Material:	<b>URETHANE</b>	
Length:	<b>11.5" / 21.22 cm</b>	
Shipping Weight:	<b>5 lbs / 2.27 kgs</b>	
Shipping Dimensions:	<b>13 x 8 x 7" / 32 x 20 x 18 cm</b>	
Sling Model:	<b>Metal "D-Ring" Sling</b>	
Sling Type:	<b>RS 234D</b>	
*Sling height:	<b>8" / 20 cm</b>	
Sling Material:	<b>UV Resistant Treated Polyester</b>	
Rated Capacity:	<b>2000 lbs/907 kgs @ 5:1 WLL</b>	<b>648 kgs/1428 lbs @ 7:1 WLL</b>
Maximum Temperature:	<b>200° F / 93.3° C</b>	

\*Measured from top of the bun to the top of the sling

**Notes:** Hosebun for 4" (10cm) hose with "D-Ring" sling attachment for easier mounting.  
**CE certified slings available at a rated capacity of 1000 kgs @ 7:1**



© 2015 property of IceCap Equity Corp. All Rights Reserved.

**USA & Canada (Toll Free)**

Tel: 888-829-3773

Fax: 877-382-9626

**International**

Tel: 403-294-0275

Fax: 403-294-0274

**Email: [info@hosebun.com](mailto:info@hosebun.com)**

**“The Best Hose Suspension in the World”**



**MODEL**  
**HB 400 H**

**For**  
**Hose I.D. 4” (10 cm)**



Material:	<b>URETHANE</b>
Length:	<b>11.5” / 28.75 cm</b>
Shipping Weight:	<b>5 lbs / 2.3 kgs</b>
Shipping Dimensions:	<b>13 x 8 x 7"</b> <b>or</b> <b>32 x 20 x 18 cm</b>
Sling Type:	<b>Type 4 Hook Eye</b>
Sling Model:	<b>RS 234H</b>
*Sling height: <small>*Measured from top of the bun to the top of the sling</small>	<b>14.75” / 37.2 cm</b>
Sling Material:	<b>UV Resistant Treated Polyester</b>
Rated Capacity:	<b>2000 lbs/907 kgs @ 5:1 WLL</b>
	<b>648 kgs/1429 lbs @ 7:1 WLL</b>
Maximum Temperature:	<b>200° F / 93.3° C</b>

**Notes:** Hosebun for 4” (10cm) hose with type 4 hook eye sling for increased strength and work safety.  
**CE certified slings available at a rated capacity of 1000 kgs @ 7:1**



© 2015 property of IceCap Equity Corp. All Rights Reserved.

**USA & Canada (Toll Free)**

Tel: 888-829-3773

Fax: 877-382-9626

**International**

Tel: 403-294-0275

Fax: 403-294-0274

**Email: [info@hosebun.com](mailto:info@hosebun.com)**



**“The Best Hose Suspension in the World”**



**MODEL**  
**HB 200 SRD**  
**For**  
**Hose I.D. 2" (5 cm)**



Material:	<b>URETHANE</b>	
Length:	<b>12" / 30.5 cm</b>	
Shipping Weight:	<b>2.5 lbs / 1.1 kgs</b>	
Shipping Dimensions:	<b>13 x 5 x 3.5" / 33 x 13 x 9 cm</b>	
Sling Model:	<b>Metal "D-Ring" Sling</b>	
Sling Type:	<b>RS 16D</b>	
*Sling height:	<b>7.25" / 18.4 cm</b>	
Sling Material:	<b>UV Resistant Treated Polyester</b>	
Rated Capacity:	<b>1350 lbs/ 612 kgs @ 5:1 WLL</b>	<b>437 kgs/ 964 lbs @ 7:1 WLL</b>
Maximum Temperature:	<b>200° F / 93.3° C</b>	

\*Measured from top of the bun to the top of the sling

**Notes:** Also available with Type 4 Hook-Eye sling (Model # RS 234H) for heavy duty jobs.  
(WLL for RS 234H: 2000lb / 907kgs @ 5:1 or 648kgs / 1428lbs @ 7:1)

**CE certified slings available at a rated capacity of 500 kgs @ 7:1**



© 2015 property of IceCap Equity Corp. All Rights Reserved.

**USA & Canada (Toll Free)**

Tel: 888-829-3773

Fax: 877-382-9626

**International**

Tel: 403-294-0275

Fax: 403-294-0274

**Email: [info@hosebun.com](mailto:info@hosebun.com)**

**“The Best Hose Suspension in the World”**



**MODEL**  
**HB 600 H**

**For**  
**Hose I.D. 6" (15 cm)**



Material:	<b>URETHANE</b>
Length:	<b>21.5" / 54.6 cm</b>
Shipping Weight:	<b>17 lbs / 7.7 kgs</b>
Shipping Dimensions:	<b>23 x 10 x 15"</b> or <b>57 x 23 x 31 cm</b>
Sling Type:	<b>Type 4 Hook Eye</b>
Sling Model:	<b>RS 600H</b>
*Sling height: <small>*Measured from top of the bun to the top of the sling</small>	<b>22.5" / 57.15 cm</b>
Sling Material:	<b>UV Resistant Treated Polyester</b>
Rated Capacity:	<b>8000 lbs / 3629 kgs @ 5:1 WLL</b>
	<b>2590 kgs / 5700 lbs @ 7:1 WLL</b>
Maximum Temperature:	<b>200° F / 93.3° C</b>

**Notes:** Use Heat Wrap to extend temperature capacity up to 1100°F / 593°C (Model# HW600).  
For 5" ID hoses, please ask us about our hosebun liners to ensure a secure fit. (Model# HBL 600).  
**CE certified slings available at a rated capacity of 3000 kgs @ 7:1**



© 2015 property of IceCap Equity Corp. All Rights Reserved.

**USA & Canada (Toll Free)**

Tel: 888-829-3773

Fax: 877-382-9626

**International**

Tel: 403-294-0275

Fax: 403-294-0274

**Email: [info@hosebun.com](mailto:info@hosebun.com)**

**“The Best Hose Suspension in the World”**



**MODEL**  
**HB 800 H**

**For**  
**Hose I.D. 8” (20 cm)**



Material:	<b>URETHANE</b>
Length:	<b>30.5” / 77.5 cm</b>
Shipping Weight:	<b>37 lbs / 16.8 kgs</b>
Shipping Dimensions:	<b>32 x 12 x 15"</b> <b>or</b> <b>81 x 31 x 38 cm</b>
Sling Type:	<b>Type 4 Hook Eye</b>
Sling Model:	<b>RS 800H</b>
*Sling height: <small>*Measured from top of the bun to the top of the sling</small>	<b>18” / 45.7 cm</b>
Sling Material:	<b>UV Resistant Treated Polyester</b>
Rated Capacity:	<b>12000 lbs / 5443 kgs @ 5:1 WLL</b>
	<b>3888 kgs / 8570 lbs @ 7:1 WLL</b>
Maximum Temperature:	<b>200° F / 93.3° C</b>

**Notes:** Use Heat Wrap to extend temperature capacity up to 1100°F / 593°C (Model# HW800).  
**CE certified slings available at a rated capacity of 4000 kgs @ 7:1 WLL**



© 2015 property of IceCap Equity Corp. All Rights Reserved.

**USA & Canada (Toll Free)**

Tel: 888-829-3773

Fax: 877-382-9626

**International**

Tel: 403-294-0275

Fax: 403-294-0274

**Email: [info@hosebun.com](mailto:info@hosebun.com)**

**“The Best Hose Suspension in the World”**



**MODEL**  
**HB 1000 H**  
**For**  
**Hose I.D. 10” (25 cm)**



Material:	<b>URETHANE</b>
Length:	<b>40.75" / 103.5 cm</b>
Shipping Weight:	<b>62 lbs / 28 kgs</b>
Shipping Dimensions:	<b>42 x 15 x 18"</b> <b>or</b> <b>106 x 37.5 x 46 cm</b>
Sling Type:	<b>Type 4 Hook Eye</b>
Sling Model:	<b>RS 1000H</b>
*Sling height: <small>*Measured from top of the bun to the top of the sling</small>	<b>19.25" / 48.90 cm</b>
Sling Material:	<b>UV Resistant Treated Polyester</b>
Rated Capacity:	<b>15000 lbs / 6803 kgs @ 5:1 WLL</b>
	<b>4860 kgs / 10700 lbs @ 7:1 WLL</b>
Maximum Temperature:	<b>200° F / 93.3° C</b>

**Notes:** Use Heat Wrap to extend temperature capacity up to 1100°F / 593°C (Model# HW 1000).  
**CE certified slings available at a rated capacity of 5000 kgs @ 7:1 WLL**



© 2015 property of IceCap Equity Corp. All Rights Reserved.

**USA & Canada (Toll Free)**

Tel: 888-829-3773

Fax: 877-382-9626

**International**

Tel: 403-294-0275

Fax: 403-294-0274

**Email: [info@hosebun.com](mailto:info@hosebun.com)**

**“The Best Hose Suspension in the World”**



**MODEL**  
**HB 1200 H**  
**For**  
**Hose I.D. 12” (30 cm)**



Material:	<b>URETHANE</b>
Length:	<b>40.75" / 103.5 cm</b>
Shipping Weight:	<b>62 lbs / 28 kgs</b>
Shipping Dimensions:	<b>42 x 15 x 18"</b> or <b>106 x 37.5 x 46 cm</b>
Sling Type:	<b>Type 4 Hook Eye</b>
Sling Model:	<b>RS 1000H</b>
*Sling height: <small>*Measured from top of the bun to the top of the sling</small>	<b>23.25" / 59.1 cm</b>
Sling Material:	<b>UV Resistant Treated Polyester</b>
Rated Capacity:	<b>15000 lbs / 6803 kgs @ 5:1 WLL</b>
	<b>4860 kgs / 10700 lbs @ 7:1 WLL</b>
Maximum Temperature:	<b>200° F / 93.3° C</b>

**Notes:** Same mold as the HB 1000H but with a longer sling to accommodate a 12" (30cm) I.D. hose. Use Heat Wrap to extend temperature capacity up to 1100°F / 593°C (Model# HW 1200).

**CE certified slings available at a rated capacity of 5000 kgs @ 7:1 WLL**



© 2015 property of IceCap Equity Corp. All Rights Reserved.

**USA & Canada (Toll Free)**

Tel: 888-829-3773

Fax: 877-382-9626

**International**

Tel: 403-294-0275

Fax: 403-294-0274

**Email: [info@hosebun.com](mailto:info@hosebun.com)**



**“The Best Hose Suspension in the World”**



**HOSECADDY™**

**MODEL  
HC 1000**



Material:	<b>Each Hosecaddy™ is made with a rugged steel construction which then undergoes hot dipped galvanization and powder coated to ensure years of maintenance-free protection performance.</b>
Weight:	<b>Steel Frame: 82lbs / 37kgs Hardened Aluminum Frame: 59lbs / 27kgs</b>
Dimensions:	<b>43x20.25x17.5" / 109.22x51.44x44.45cm</b>
Load Capacity:	<b>Heavy duty, easy rolling 6" swivel castors, on all four corners, have a working load capacity of 1600lbs / 726kgs.</b>
Hose Dimensions:	<b>Designed for 6" to 12" large bore hose, or, a bundle of small 3 to 4" hoses.</b>

**NOTES:** - Available in Aluminum: Model# HC 1000A, or Steel: Model# HC 1000M.

- Standard Colour: Inferno Orange; Additional colours available upon request.



© 2009 property of IceCap Equity Corp. All Rights Reserved.

**USA & Canada (Toll Free)**

Tel: 888-829-3773

Fax: 877-382-9626

**International**

Tel: 403-294-0275

Fax: 403-294-0274

**Email: [info@hosebun.com](mailto:info@hosebun.com)**



**"The Best Hose Suspension in the World"**



**HOSEHORSE™**  
**MODEL**  
**HH**

**Model# HH 24-2345**

**-Fits OD Hose up to:**

**5.5" / 14cm**

**- Ship Weight:**

**5lbs / 2.3kgs**



Material:	<b>Molded Plastic</b>
Shipping Weight:	<b>From 4 to 18 lbs; depending on model</b>
Dimensions:	<b>Depends on Model</b>
Hose Dimensions:	<b>Models available to fit hose sizes from 2" / 5.1cm, up to, 24" / 61 cm</b>

**Model# HH 24-6**

**- 24" / 91cm High**

**- Fits 6" / 15.24cm**

**OD Hose**

**-Square bottom**

**- Red Only**

**- Ship Weight:**

**9 lbs / 4.08kgs**

**- Ratches & Straps avail.**



**Model# HH 24-1012**

**- 24" / 91cm High**

**- Fits OD Hose**

**10-12" / 25-30cm**

**- Comes with Ratchets & Straps**

**- Ship weight:**

**18 lbs / 52 kgs**



© 2009 property of IceCap Equity Corp. All Rights Reserved.

**USA & Canada (Toll Free)**

Tel: 888-829-3773

Fax: 877-382-9626

**International**

Tel: 403-294-0275

Fax: 403-294-0274

**Email: [info@hosebun.com](mailto:info@hosebun.com)**

**“The Best Hose Suspension in the World”**




**HoseHOG™**  
**MODEL**  
**HG 7-234**

Hoses are laid on top of rocks and the vibration from the pumps extend into the hoses and pin holes occur.

How do you prevent the costly event of a spill from  
OIL PRODUCED FLUID or ANYTHING THAT IS HAULED?

*the answer is simple!*

HoseHOG: Hose off Ground

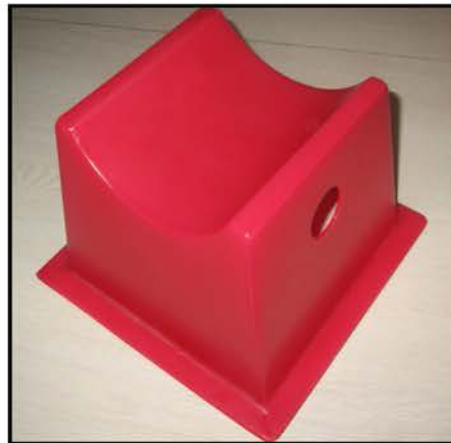

Material:	<b>Made of Polyurethane</b>
Weight:	<b>1.2lbs / .55kgs ; Easy to set up on your truck.</b>
Height:	<b>Stands 7" high</b>
Hose Dimensions:	<b>The contoured radius of the HoseHOG accomodates 2", 3" and 4" ID hoses</b>



© 2009 property of IceCap Equity Corp. All Rights Reserved.

**USA & Canada (Toll Free)**

Tel: 888-829-3773

Fax: 877-382-9626

**International**

Tel: 403-294-0275

Fax: 403-294-0274

**Email: [info@hosebun.com](mailto:info@hosebun.com)**